

ACTIVE ROAD MARKING
as
ORIENTATION ILLUMINATION
for
Unilluminated cycle paths.



OUR SOLUTIONS based on Solar-Energy

Two directions cycle path : Axis marking

Product : embedded lighting ILSE-302, ILSE-308 or ILSE-140 double side constant white

How ? One lighting central every 5 m

One direction cycle path : Side marking

Product : embedded ILSE-302, ILSE-308 or ILSE--140 or surface ILSS-311 single side constant white

How ? One lighting on both sides every 5 m with a shift left from right side of 2,5 m

On Points of Conflict or obstacles : extra Axis-or side marking

Product : embedded ILSE-302, ILSE-308 or ILSE--140 or surface ILSS-311 single side white Flashing

How ? Central every 2,5 m or in front of obstacles or at outside of the curve

More info on www.illuxys.eu

Do not hesitate to contact us for more technical info or pricing


ILSE-302 : dia 78x20 mm




ILSE-140 : dia 153 x 53 mm



ILSS-311 : 135x100x9 mm

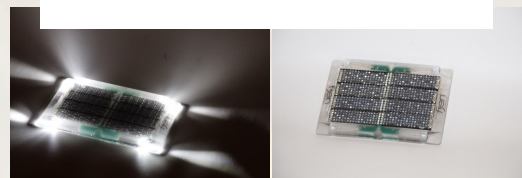

ILSE-308 : dia 110 x 35 mm

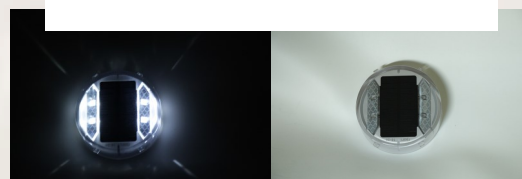


Points of Conflict :

Scharp curves

Poles

Traffic guiders

...

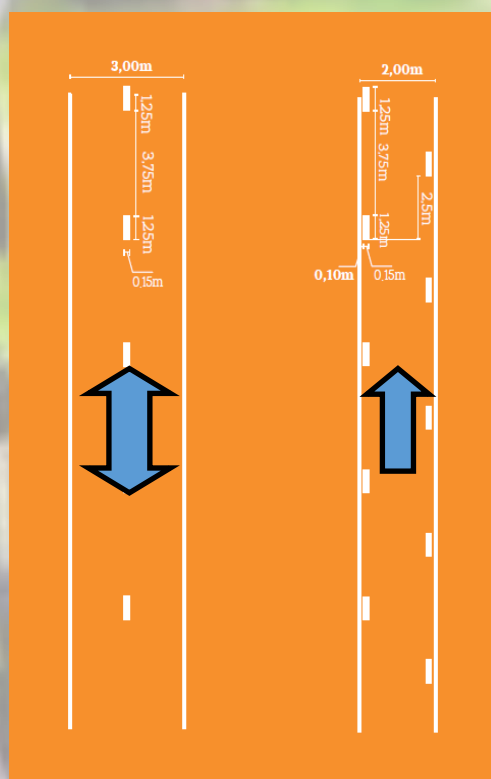

SKYRA b.v.b.a. , Boterbloemstraat 1, B-8570 Vichte

M : +32(0)478/412.350

illuxys@telenet.be

info@illuxys.eu

www.illuxys.eu

ILLUXYS
your natural light